

SEPTANK

safe sanitation • for healthy living



- Successful and extensively used South African design
- Dome shaped for extra strength
- Easy to transport and install
- Up to three inlet points
- Flat bottomed
- Standard product
- Affordable & Readily available

Aquasan, the manufacturers of AFRITANK the No. 1 water tank, now bring you SEPTANK - the State of the Art Septic Tank - made with food grade polyethylene and based on a very successful South African design in use for more than 17 years.

The product is moulded in one piece. Its unique dome shaped design provides excellent strength. Its flat base makes installation quick and simple. Compared to the more common masonry/concrete septic tanks, SEPTANK has several major outstanding advantages shown above.

Start using SEPTANK today and enjoy its benefits.

For innovative sanitation solutions choose SEPTANK

Help your friends in need
Tell them all about our
SEPTANK



AquaSanTec® Group Companies www.aquasantec.com

AST CRESTANKS Ltd. Kampala
Uganda
Tel: +256 041 4 235 470, 348 973, 031 2 262 015/6
Mobile: 0772 720 560 Fax: 0414 234 184
Email: info@crestanks.co.ug www.aquasantec.com

AST AQUASAN Ltd. Kigali
Rwanda
Mobile: +250 788 380 855, 788 307 833
Email: aquasanrw@gmail.com
www.Aquasantec.com


AST AQUASAN s.a. Bujumbura
Burundi
Tel (Fixe): +257 295 5158,
Portable: +250 788 307 833
Email: aquasanbri@yahoo.com www.aquasantec.com

AST KENTAINERS Ltd. Nairobi
Kenya
Tel: 254 020 251 9098 / 251 9099
Fax: 254 (020) 476 5585
info@kentainers.co.ke www.aquasantec.com

AST AQUASAN Juba
South Sudan
Mobile nos: Gemtel +211 0 977106550
Email: aquasan_ssjuba@yahoo.com
www.aquasantec.com

SEPTANK - THE SEPTIC TANK - SPT SERIES

INSTALLATION

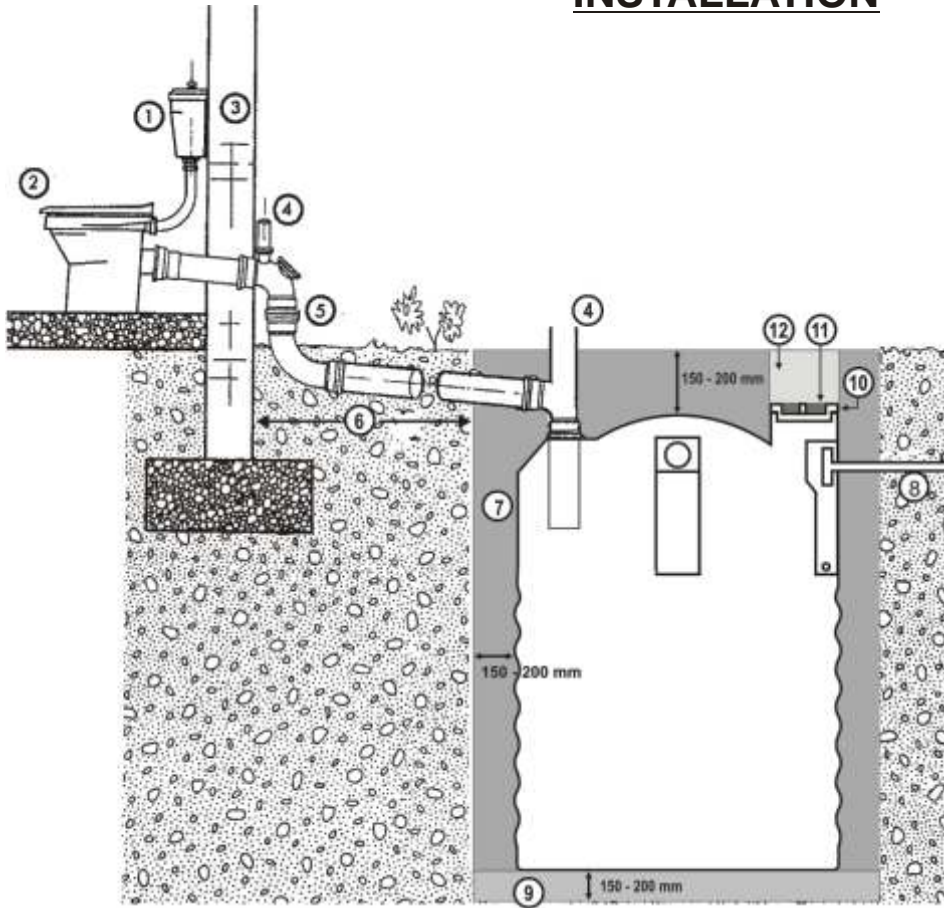

Key

1. Cistern
2. Toilet Pedestal with lid
3. Toilet wall
4. Vent outlet
5. Pipe connection to septic tank
6. Keep adequate distance between the tank and the foundation of the house
7. Dug out pit backfilled with sand or sand-crete (10% cement 90% sand)
8. Outlet to soak pit
9. Compacted sand base without any stones or sharp objects
10. Manhole lid
11. Lid cavity to be filled with concrete
12. No concrete or soilcrete should be placed above manhole use normal soil

Note

1. Do not direct water from shower or bathroom sinks to the septic tank. Direct these into the soak pit
2. Do not use excessive detergents, disinfectants or bleach as they kill useful bacteria that decompose waste
3. Locate tank away from driveway to prevent collapse of tank
4. For rapid decomposition, use EM or similar agents and follow manufacturers user instructions
5. Always fill tank with water to just below outlet before use and backfilling dugout pit

Material: Polyethylene
 Standard colour: Black
 Septic tank supplied complete with
 2" PVC outlet pipe, 4" PVC inlet socket,
 secondary tank and access/manhole lid

DIMENSIONS

Code	Approx capacities and dimensions		Height (cm)	Diameter (cm)	Users
	Capacity				
	Litres	Gallons			
SPT 200	2000L	435	139	150	1-5
SPT 250	2500L	543	170	150	6-10
SPT 300	3000L	652	198	150	10-15

